

UNITED KINGDOM ROCKETRY ASSOCIATION



UNITED KINGDOM ROCKETRY ASSOCIATION

STUDY GUIDE

SAFETY OFFICERS EXAMINATION
AND
LEVEL II FLIGHT CERTIFICATION EXAMINATION

© United Kingdom Rocketry Association 2017
Reproduction with permission only.

UNITED KINGDOM ROCKETRY ASSOCIATION

This document is published by the Council of the United Kingdom Rocketry Association and is valid with amendment slips provided as appropriate.

AMENDMENT STATUS

ALL PAGES	REVISION 0.1	30/04/98
ALL PAGES	REVISION 0.2	07/07/98
ALL PAGES	REVISION 1.0	10/02/00
ALL PAGES	REVISION 2.0	01/02/01
ALL PAGES	REVISION 2.1	19/06/01
ALL PAGES	REVISION 2.2	12/11/01
ALL PAGES	REVISION 3.0	30/09/17

Contents

1.	INTRODUCTION.....	3
2.	PURPOSE OF THIS DOCUMENT.....	3
3.	QUESTIONS.....	4

1. INTRODUCTION

1.1. UNITED KINGDOM ROCKETRY ASSOCIATION DOCUMENT

1.1.1. This document will not be published annually. Alterations or amendments to its contents will, however, be issued when necessary.

1.2. CORRESPONDENCE WITH THE ASSOCIATION

1.2.1. If you should need to correspond with the Association, with reference to this document, please send all correspondence via the main UKRA mailing address.

2. PURPOSE OF THIS DOCUMENT

2.1. The purpose of this document is to prepare the member to take the Safety Officer/Level II Certification examination.

2.2. The examination questions for the above Safety Officer/Level II Certification examination will be taken from this study guide.

2.3. Correct answers are indicated by an asterisk.

3. QUESTIONS

QUESTION 1: What does 'CG' stand for in rocket terminology?

- A: Calculated gravity
- B: Centre of gravity *
- C: Concentric geometry

QUESTION 2: What does 'CP' stand for in rocket in rocket terminology?

- A: Centre of pressure *
- B: Circular parachute
- C: Calculated pressure

QUESTION 3: What relationship must the 'CG' of a rocket have to the 'CP' of a rocket for it to fly safely?

- A: The 'CG' must be greater than the 'CP'
- B: The 'CG' must be at least one body tube diameter forward of the 'CP' *
- C: The 'CG' must be at least one body tube diameter aft of the 'CP'

QUESTION 4: Which of the following suggestions would help most to make a marginally stable rocket safer to fly?

- A: Add weight to the nose *
- B: Make the fins smaller
- C: Use a less powerful motor

QUESTION 5: If the wind at your launch site is blowing toward trees at an average speed of 35 km/hour (approx. 22mph) should you . . .

- A: Angle your rocket 10 degrees into the wind to minimise recovery drift
- B: Reduce the size of the parachute to increase descent rate
- C: Not fly your rocket at all *

QUESTION 6: You have a rocket, which is predicted to go to 610m (approx. 2000ft) on a 3 grain I236 reload but a strong breeze is blowing. For safety, what would be the best action to take. . . .

- A: Use a slower burning I170 reload to reduce the rockets peak altitude
- B: Use a smaller parachute to stop the rocket drifting out of the site
- C: Use a faster burning I345 reload to increase the rocket's take off velocity *

QUESTION 7: If you recess the nozzle end of a rocket motor more than one body tube diameter into the base of a rocket what will happen?

- A: The 'Krushnick Effect' will cause the motor's power to be lost *
- B: The rocket will fly erratically due to the change in its 'CG'
- C: The 'Bernoulli principle' dictates the rocket may not lift off the launch pad.

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 8: You are making an ejection charge to be fired from an altimeter in a 100 mm (approx. 4 inch) diameter rocket. The charge should be about:

- A: 1g in weight *
- B: 6g in weight
- C: 28g in weight

QUESTION 9: A rocket is predicted to reach 1036m (approx. 3400ft) in altitude. Its potential maximum ballistic range is around. . .

- A: 671m (2200ft)
- B: 1036m (3400ft)
- C: 2134m (7000ft) *

QUESTION 10: A rocket is 150mm (approx. 6 inches) in diameter, 2.44m (approx. eight feet) long and weighs around 6kg (12lbs approx.) without a motor. A good motor for its first flight would be. . . .

- A: A 540Ns I470
- B: A 1261Ns J449 *
- C: A 3147Ns L935

QUESTION 11: A rocket motor of 1200Ns total impulse and burning for 6 seconds would be classed as a.

- A: J1200
- B: K200
- C: J200 *

QUESTION 12: Which of the following motors has the longest burn time?

- A: A 1280Ns J300 *
- B: A 700Ns J 200
- C: A 1000Ns J420

QUESTION 13: Which of the following motors has the highest average thrust?

- A: A 1200Ns J400 *
- B: A 1280Ns J280
- C: A 2560Ns K250

QUESTION 14: What is the total impulse of a motor that gives 400N average thrust for four seconds?

- A: 400Ns
- B: 400 Newtons
- C: 1600Ns *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 15: A rocket weighing 1kg (2lbs approx.) without motor and flying on a motor giving 800N of thrust will. . . .

- A: Probably crash because it is underpowered
- B: fly well but not go very high
- C: probably reach supersonic speed *

QUESTION 16: A rocket motor is classed as 'high power' if its propellant mass is greater than:

- A: 125g
- B: 62.5g *
- C: 100g

QUESTION 17: When does a UKRA Safety Officer have authority to cancel a launch?

- A: When consulted by the flyer
- B: When the Launch Control Officer is unavailable to check a flight
- C: At all times *

QUESTION 18: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single I or J class motor?

- A: 45m (148ft) *
- B: 15m (49ft)
- C: 60m (197ft)

QUESTION 19: A large rocket has a 54mm central composite reload & twenty D12 black powder motors surrounding it, all electrically ignited by individual igniters. What is the probable launch scenario?

- A: The central motor will light first then the 'D's will air light. The flight will be successful.
- B: The 'D's will light first lifting the rocket off the pad at a very low speed resulting in a probable crash when the central motor lights moments later. *
- C: All motors will fire at about the same time.

QUESTION 20: Roughly what altitude will a 100mm (approx. 4inch) diameter rocket weighing 3kg (6lbs approx.) and flying on a full 640Ns 'I' motor reach.

- A: Approximately 427m (1400ft)
- B: Approximately 762m (2500ft) *
- C: Approximately 1189m (3900ft)

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 21: Roughly what altitude will a 150mm (approx. 6 inch) diameter rocket weighing 7kg (14lbs approx.) and flying on a full 2560Ns 'K' motor reach.

- A: Approximately 396m (1300ft)
- B: Approximately 671m (2200ft)
- C: Approximately 1219m (4000ft) *

QUESTION 22: Roughly what altitude will a 66mm (approx. 2.6 inch) diameter rocket weighing 1.5kg (3lbs approx.) and flying on a 240Ns 'H' motor reach.

- A: Approximately 274m (900ft)
- B: Approximately 610m (2000ft) *
- C: Approximately 1036m (3400ft)

QUESTION 23: Which of Newton's laws of motion best describes the operation of a rocket motor?

- A: 1st law: A body will stay still or in constant motion in a straight line unless acted upon by a force.
- B: 2nd law: The rate of change of momentum in a body is proportional to the force acting upon the body.
- C: 3rd law: For every action there is an equal and opposite reaction. *

QUESTION 24: What are the three principle forces acting on a rocket during flight?

- A: Thrust, body diameter and surface finish.
- B: Nose shape, thrust and aerodynamic drag.
- C: Gravity, thrust and aerodynamic drag. *

QUESTION 25: What are the three factors that have the greatest effect on a rocket's peak altitude?

- A: Lift off weight, propellant weight and motor thrust.
- B: Fin size, propellant weight and motor thrust.
- C: Motor thrust, weight and aerodynamic drag. *

QUESTION 26: To fly a rocket with a single motor of 2000Ns total impulse you must be UKRA certified to:

- A: Level 1
- B: Level 2 *
- C: Level 3

QUESTION 27: To fly a rocket powered by a cluster consisting of one 'H' class motor and three 'D' class motors totalling 330Ns you must be UKRA certified to:

- A: Level 1 *
- B: Level 2
- C: Level 3

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 28: All launch pads / towers must be:

- A: Rigid enough so as not to deflect or break under 48 kmph (30mph) winds.
- B: Able to support the weight of the largest rocket that could be fitted to it.
- C: Rigid enough so as not to deflect under strongest launchable winds. *

QUESTION 29: A payload cannot be flown if it is:

- A: Likely to cause radio interference. *
- B: Inflammable in nature. *
- C: Over 2 times the weight of the empty rocket in which it is to be flown.
- D: A vertebrate creature. *

QUESTION 30: To achieve Level 1 certification you must:

- A: Successfully launch a rocket powered by motor/s of 160.01 to 640.01Ns total impulse.
- B: Successfully launch and retrieve a rocket powered by an 'H' or 'I' motor.
- C: Successfully demonstrate to the RSO a rocket flight powered by an 'H' or 'I' class motor. *

QUESTION 31: A rocket containing seven motors ignited with fuses is:

- A: Automatically classed as experimental.
- B: Not allowed to fly at a UKRA event.
- C: Classed as a complex rocket and should be launched from a greater distance than an equal power rocket employing a single motor. *

QUESTION 32: A two-stage rocket employing an 'I' class booster and 'H' class sustainer is:

- A: Classed as a 'complex' rocket and should be launched from a greater distance than an equal power rocket employing a single motor. *
- B: To be treated in the same way as a single stage 'J' powered rocket.
- C: Classed as a Level 2 rocket because its total impulse is over 640.01Ns.

QUESTION 33: A two stage rocket employing electronic ignition of the second stage crashes during first stage burn. The first thing the safety officer must do is:

- A: Check if the rocket is damaged.
- B: Inform the Launch Control Officer of the situation then take a fire extinguisher to the rocket in case of a grass fire at the impact point.
- C: Stop spectators approaching the live upper stage and make sure everyone is ready in case of a land shark. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 34: Which of the following (multiple answers) need to be checked on a high-powered rocket before allowing it to fly:

- A: Recovery system attachments. *
- B: Fin attachment. *
- C: Body tube strength. *
- D: The nose cone has extra mass in it.
- E: Inclusion of a static vent. *
- F: All electronics are powered only by Duracell batteries.
- G: Engine mount strength. *
- H: The parachute has the correct sized spill hole.

QUESTION 35: A flyer wishing to launch an 8kg (approx. 18lbs) rocket on a 'L' class motor must have:

- A: A suitable NOTAM clearance, a Police licence to acquire or acquire and keep explosives and permission from the LCO.
- B: Suitable NOTAM clearance, A Police licence to acquire or acquire and keep explosives, Level 2 certification and CAA clearance.
- C: An HSE 'RCA' document, Level 2 certification and permission from the relevant launch official.
- D: A police license to acquire or acquire and keep explosives, Level 2 certification and permission from the relevant launch official. *

QUESTION 36: If anyone on the range shouts 'heads up' the safety officer must:

- A: Run for the nearest cover.
- B: Get the spectators to the nearest cover.
- C: Encourage everyone to stand still and look up. *

QUESTION 37: If a NOTAM has been issued to 762m (2500ft) and a rocket is predicted to reach 777m (2550ft) in altitude the Safety Officer should:

- A: Refuse permission to fly. *
- B: Check over the altitude predictions to determine their accuracy.
- C: Consult with the LCO and make a visual check for aircraft before flight.

QUESTION 38: Night launching of high power rockets is only permitted:

- A: When illuminated recovery devices are employed.
- B: When illuminated recovery devices are employed, on November 5th or when special permission has been given by the Technical and Safety committee of UKRA for a non-illuminated night flight. *
- C: On November 5th, away from coasts and when illuminated recovery devices are employed.

QUESTION 39: All rockets should be designed and built to be recovered.....

- A: By parachute.
- B: Within the boundary of the launch area.
- C: Substantially intact so as they can be launched again. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 40: A certification flight is considered successful when:

- A: The rocket is brought back to the certifying officer intact.
- B: The rocket successfully deploys its recovery system without major fault. *
- C: The rocket launches successfully.

PLEASE TURN TO THE DIAGRAM SHEET ON THE LAST PAGE.

QUESTION 41: What does the circular symbol on rockets 'A' and 'B' mean?

- A: Centre of gravity. *
- B: Centre of Pressure.
- C: Rotational symmetry point in diagram.

QUESTION 42: What is wrong with the aft fins on rocket 'A' if it were intended for high speed flight?

- A: They are not big enough.
- B: They are not of a delta design.
- C: Their span is too great in comparison with their root edge. *

QUESTION 43: What effect may the forward fins have on the flight characteristics of rocket 'A'?

- A: They will add to its stability by increasing the overall fin area.
- B: They will decrease its stability because they move its C/P forward. *
- C: They will have little effect because of the rocket's length.

QUESTION 44: From the information supplied by the diagram would you expect rocket 'A' to be stable in low-speed flight?

- A: No it will probably be unstable. *
- B: Yes it will probably be stable.
- C: There is not sufficient information supplied.

QUESTION 45: Between rocket 'A' and 'B' which would be more likely to survive supersonic flight, assuming similar construction?

- A: Rocket 'A'.
- B: Rocket 'B'. *
- C: There is insufficient information supplied.

QUESTION 46: Between rocket 'A' and 'B' which is more stable?

- A: Rocket 'A'.
- B: Rocket 'B'. *
- C: There is insufficient information supplied.

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 47: Rocket 'B' has a solid hard-wood nose cone. For safety, what would you recommend to the flyer?

- A: To use a light balsa or plastic nose instead.
- B: To angle the rocket down range and launch in light breeze only. *
- C: Not to fly at all because the rocket is too dangerous.

QUESTION 48: If rocket 'A' is 100mm (approx. 4") in diameter and weighs 3kg (6lbs approx.) and rocket 'B' is 125mm (approx. 5") in diameter and weighs 2.5kg (5lbs approx.) which would reach the higher altitude if both were launched on identical motors?

- A: Rocket 'A'. *
- B: Rocket 'B'.
- C: There is insufficient information supplied.

QUESTION 49: Between rocket 'A' and 'B' which has a more suitable nose shape for flight at 1290 kilometres/hour (approx. 800mph)?

- A: Rocket 'A' *
- B: Rocket 'B'
- C: Both are unsuitable for such high-speed flight.

QUESTION 50: If rocket 'B' was to be used for a level 2 certification flight and there was a stiff breeze blowing what motor would you recommend be used?

- A: A 'J95' to keep airspeed low.
- B: An 'I435' to keep airspeed high.
- C: A 'J350' to keep airspeed moderate. *

QUESTION 51: For what reason would a rocketeer require an RCA?

- A: To legally purchase a motor from a vendor
- B: The purchase and launch a rocket motor
- C: To be legally allowed to transport explosive material. *
- D: To be legally allowed to store explosive material.

QUESTION 52: Which options apply to an "Acquire only" explosives certificate when dealing with more than 5kg NEQ?

- A: Requires a registered store of relevant UN classes.
- B: Must purchase and use certified motors on site. *
- C: May purchase certified motors via mail order. (Requires RCA for relevant UN classes.)
- D: Motors must be disposed of in an appropriate manner if unused. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 53: Which option (or options) apply to an “Acquire and Keep” explosives certificate when considering over 5kg NEQ (net explosive content).?

- A: Requires a registered store of relevant UN classes *
- B: Must purchase and use motors certified motors on site.
- C: May purchase rocket motors via mail order. (Requires RCA for relevant UN classes.) *
- D: Must destroy any unused motors on site.

QUESTION 54: What is the maximum amount of NEQ (net explosive content) that can be kept in a registered store (Mode B).

- A: 10kg
- B: 15kg
- C: 2000kg *
- D: One M Reload

QUESTION 55: What do you need an RCA document for?

- A: To handle explosive material.
- B: To transport explosive material. *
- C: To launch rockets.

QUESTION 56: What is a “registered store”?

- A: A registered Ammo box.
- B: The entire property named on the registration. *
- C: Your field launch box.

QUESTION 57: What is prohibited from being kept in a registered store if any other UN class of explosive is stored there?

- A: Any Combustible material. *
- B: Petrol or any other flammable liquid. *
- C: Black powder. *

QUESTION 58: Where are explosives certificates, registered store and RCA obtained?

- A: Registered store = Police, Explosives Cert. = HSE, RCA = Fire Brigade.
- B: Registered store = Fire Brigade, Explosives Cert. = HSE, RCA = Police.
- C: Registered store = Local Authority or Police, Explosives Cert. = Police, RCA = HSE or Police. *

QUESTION 59: Where may UN Class numbers for any item of interest to UKRA members be obtained?

- A: The manufacturer / distributor of the item. *
- B: The Police.
- C: The HSE. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 60: There is an exemption for the requirement to obtain an explosives certificate if

- A: You intend to fly all the motors on the day of purchase irrespective of total mass.
- B: You will keep and store no more than 5kg net mass of propellant with 1kg single item limit. *
- C: There is no exemption from explosive licensing.
- D: You have held an RCA document within the past 10 years.

QUESTION 61: When determining the centre of gravity (CG) of a rocket with a heavier motor at the launch site one can

- A: Install the motor, recovery system and payload and determine the balance point of the rocket as it is ready for flight. *
- B: Balance the rocket with an empty motor because that is the condition of the rocket after burn out.
- C: It is not necessary to test for the centre of gravity when using a more powerful motor because it has more thrust.

QUESTION 62: What happens to the centre of gravity (CG) of a rocket during a solid rocket motors thrusting phase.

- A: The centre of gravity stays the same.
- B: The centre of gravity shifts forward. *
- C: The centre of gravity shifts aft.

QUESTION 63: What happens to the coefficient of drag (C_d) as the rocket approaches the speed of sound?

- A: The C_d decreases.
- B: The C_d stays the same.
- C: The C_d increases. *

QUESTION 64: What effect does a boat tail have on a subsonic rocket's coefficient of drag (C_d)?

- A: No effect, a boat tail is only a cosmetic design feature.
- B: It increases the C_d by changing the airflow over the fins.
- C: It decreases the C_d by reducing the base drag. *

QUESTION 65: What is the thrust curve of a regressive motor burn?

- A: A regressive burn has high initial thrust relative to the end of thrust of the motor. *
- B: A regressive burn has a lower initial thrust relative to the ending thrust.
- C: The thrust curve is flat.

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 66: What is the thrust curve of a progressive motor?

- A: A progressive burn has a high initial thrust relative to the ending thrust of the motor.
- B: A progressive burn has a lower initial thrust relative to the ending thrust. *
- C: The thrust curve is flat.

QUESTION 67: What is the function of a motor liner and the O-ring seals in a solid rocket motor?

- A: To hold all of the parts in place prior to ignition of the rocket motor.
- B: To make the motor easier to clean if it is a reloadable motor.
- C: To keep the hot gasses of the motor from burning or melting the motor case. *

QUESTION 68: What is the most common oxidiser in commercially available high power composite solid rocket motors?

- A: Ammonium Perchlorate *
- B: Ammonium Nitrate
- C: Ammonium Chlorate

QUESTION 69: Why is a small hole typically recommended near the top, but below the nosecone or payload section, of a high power rocket's booster section.

- A: This hole allows excessive ejection charge pressures to vent to reduce shock cord stress.
- B: The hole is used to give air pressure readings for on-board altimeters.
- C: The hole vents internal air pressure as the rocket gains altitude to prevent premature separation. *

QUESTION 70: In general terms, the specific impulse of a rocket motor is:

- A: The total thrust force of a motor throughout its action time.
- B: The total impulse divided by unit weight of propellant. *
- C: Dependent on the diameter and length of the propellant grain.

QUESTION 71: In general terms, the total impulse of a rocket motor can be described as:

- A: The product of the average motor thrust and its burn time. *
- B: The product of the propellant weight and its burn time.
- C: The product of the propellant weight and the motor thrust.

QUESTION 72: What is a Newton?

- A: The amount of force required to accelerate one pound one foot per second per second.
- B: The amount of force required to accelerate one kg, one foot per second per second.
- C: The amount of force required to accelerate one kg, one meter per second per second. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 73: What does the motor designation I220-8 mean?

- A: The motor is in the I impulse range with an average thrust of 220 Newtons and an 8 second delay from motor ignition.
- B: The motor is in the I impulse range, having a total impulse of 620 Newton-seconds with an average thrust of 220 Newtons and an 8 second delay from motor burn-out.
- C: The motor is in the I impulse range with an average thrust of 220 Newtons and an 8 second ejection delay from motor burn-out. *

QUESTION 74: What is the difference in kinetic energy between two identical rockets, one descending at 9.1m/second (30 feet per second), the other descending at 18.3m/second (60 feet per second)?

- A: Cannot be determined without the mass.
- B: Two times as much energy.
- C: Four times as much energy. *

QUESTION 75: The equation for determining the energy of a moving body (such as a rocket) is:

- A: $E = 1/2 mv^2$ *
- B: $E = ma^2$
- C: $E = mv^3$

Note : m=Mass, v=Velocity, a=Area

QUESTION 76: What is the purpose of a launch lug?

- A: To add drag to the rocket at launch.
- B: To guide the rocket along the launch rod or rail. *
- C: Both a and b.

QUESTION 77: What is a shred?

- A: A failure of the rocket airframe during boost resulting in destruction of the rocket. *
- B: A failure of the recovery system during boost.
- C: A failure of the motor causing early ejection.

QUESTION 78: What is a cato?

- A: A failure of the rocket resulting in failure of the air frame during boost.
- B: A failure of the recovery system during boost.
- C: A failure of the motor causing flight termination. *

QUESTION 79: What is a complex high power rocket?

- A: A rocket having more than one stage.
- B: A rocket having a cluster of rocket motors.
- C: Both a and b. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 80: When is a recovery device not necessary in a high power rocket?

- A: When the high power rocket is intended for ballistic flight.
- B: When the rocket has a bursting charge.
- C: A recovery device is always necessary. *

QUESTION 81: When must the stability of a rocket be determined?

- A: If the safety monitor requests it.
- B: When designing a new rocket.
- C: Whenever the rocket is prepared for flight. *

QUESTION 82: What is the maximum weight of a high power rocket?

- A: Less than maximum weight recommended by the motor manufacturer for a given motor. *
- B: Less than 50 kg (112 pounds).
- C: There is no maximum high power rocket weight.

QUESTION 83: When is it permissible to catch a high power rocket?

- A: If the rocket weights less than 1 kg (2.2 pounds).
- B: It is never permissible to catch a high power rocket. *
- C: Neither a or b.

QUESTION 84: When is it permissible to consume alcohol when prepping or launching high power rockets?

- A: When the preparation is done the day before the launch.
- B: If the blood alcohol level is below the 'impaired" level.
- C: It is never permitted. *

QUESTION 85: What is the minimum safe distance for the operator from a Hybrid engine powered vehicle?

- A: 30.5m (100 ft). *
- B: 36.6m (120 ft)
- C: As referenced in the Safe Distance Chart.

QUESTION 86: At what temperature in Degrees Centigrade does Nitrous Oxide break down?

- A: 570 *
- B: 610
- C: 750

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 87: What must all (non-experimental) hybrid rockets have to comply with UKRA guidelines ?

- A: The facility to allow the system to revert to a safe and depressurised state in the event of any sort of failure. *
- B: An electrically activated remote gas cut-off valve.
- C: A pressure gauge on the oxidiser feed line.

QUESTION 88: When assembling a hybrid motor, you should always ... ?

- A: Use the correct cryolube. *
- B: Check for damage / deformation. *
- C: Use a small amount of solid rocket propellant to get the motor started at ignition.

QUESTION 89: What is the oxidiser most commonly used in a commercial hybrid rocket engine?

- A: N_2O . *
- B: N_2O_4 .
- C: NO_2 .

QUESTION 90: What is the nominal tank pressure of a nitrous oxide hybrid motor at 23.9 deg C (75 deg F)?

- A: 0.69 MPa (100 p.s.i.)
- B: 5.17 MPa (750 p.s.i.) *
- C: 10.34 MPa (1,500 p.s.i)

QUESTION 91: Above what temperature, in degrees Centigrade (Fahrenheit), does pressurised nitrous oxide change to a gas?

- A: 36.1 (97). *
- B: 24 (75).
- C: 2.7 (37).

QUESTION 92: When dealing with compressed gases, all cylinders must.....?

- A: Be periodically pressure checked and certified. *
- B: Stored upright.
- C: Transported by an approved carrier.

QUESTION 93: What is the main hazard of leaking compressed gas ?

- A: The lowering of atmospheric oxygen resulting in difficulty breathing.
- B: Risk of auto ignition once the gas mixes with air.
- C: Cold burns to exposed skin. *

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 94: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single A class motor?

- A: 2 Metres. *
- B: 3 Metres.
- C: 5 Metres.

QUESTION 95: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single B or C class motor?

- A: 2 Metres.
- B: 3 Metres. *
- C: 5 Metres.

QUESTION 96: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single D class motor?

- A: 2 Metres.
- B: 3 Metres.
- C: 5 Metres. *

QUESTION 97: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single E class motor?

- A: 7 Metres. *
- B: 3 Metres.
- C: 5 Metres.

QUESTION 98: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single F or G class motor?

- A: 10 Metres. *
- B: 7 Metres.
- C: 5 Metres.

QUESTION 99: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single H class motor?

- A: 15 Metres. *
- B: 10 Metres.
- C: 7 Metres.

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 100: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single K class motor?

- A: 15 Metres.
- B: 60 Metres. *
- C: 45 Metres.

QUESTION 101: At what minimum distance should all persons, except those required for the launch of a rocket, be kept when the vehicle is powered by a single L or M class motor?

- A: 60 Metres.
- B: 150 Metres.
- C: 90 Metres. *

QUESTION 102: For a rocket powered by a $\frac{1}{4}$ A or $\frac{1}{2}$ A class motor the launch site should normally have the following minimum dimension.

- A: 15 Metres. *
- B: 30 Metres.
- C: 60 Metres.

QUESTION 103: For a rocket powered by an A class motor the launch site should normally have the following minimum dimension.

- A: 15 Metres.
- B: 30 Metres. *
- C: 60 Metres.

QUESTION 104: For rockets powered by a B class motor the launch site should normally have the following minimum dimension.

- A: 15 Metres.
- B: 30 Metres.
- C: 60 Metres. *

QUESTION 105: For a rocket powered by a C class motor the launch site should normally have the following minimum dimension.

- A: 120 Metres. *
- B: 30 Metres.
- C: 60 Metres.

QUESTION 106: For a rocket powered by a D class motor the launch site should normally have the following minimum dimension.

- A: 150 Metres. *
- B: 300 Metres.
- C: 450 Metres.

UNITED KINGDOM ROCKETRY ASSOCIATION

QUESTION 107: For rockets powered by an E, F or G class motor the launch site should normally have the following minimum dimension.

- A: 150 Metres.
- B: 300 Metres. *
- C: 450 Metres.

QUESTION 108: For rockets powered by an H class motor the launch site should normally have the following minimum dimension.

- A: 450 Metres. *
- B: 300 Metres.
- C: 760 Metres.

QUESTION 109: For a rocket powered by an I class motor the launch site should normally have the following minimum dimension.

- A: 450 Metres.
- B: 300 Metres.
- C: 760 Metres. *

QUESTION 110: For rockets powered by a J or K class motor the launch site should normally have the following minimum dimension.

- A: 760 Metres.
- B: 3200 Metres.
- C: 1600 Metres. *

QUESTION 111: For rockets powered by an L class motor the launch site should normally have the following minimum dimension.

- A: 4700 Metres.
- B: 3200 Metres. *
- C: 1600 Metres.

QUESTION 112: For a rocket powered by an M class motor the launch site should normally have the following minimum dimension.


- A: 4700 Metres. *
- B: 3200 Metres.
- C: 1600 Metres.

QUESTION 113: What is the recommended minimum thrust to weight ratio (T:W) required for a safe stable flight.

- A: 5:1 *
- B: 50:1
- C: 1:1

Diagram Sheet

Rocket 'B'

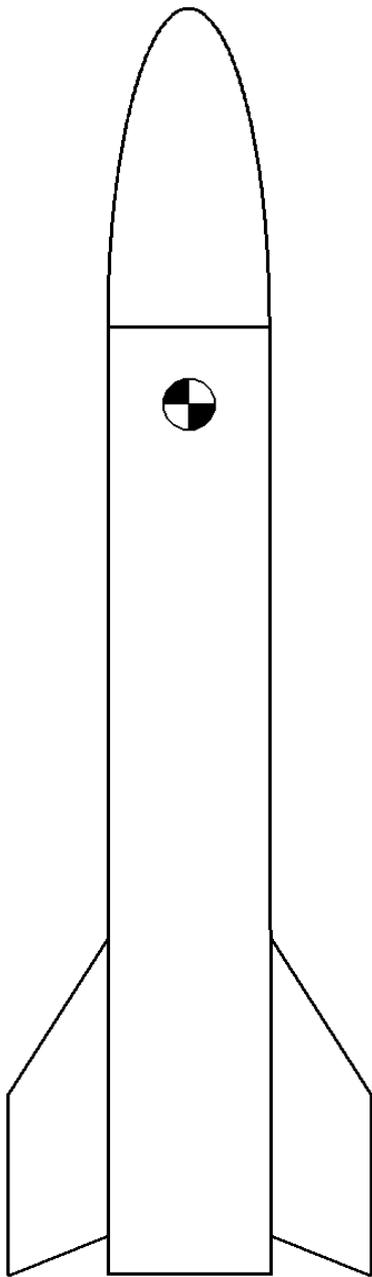

Rocket 'A'

